



HARMONY® 3-IN-1 PREMIUM UNDERLAYMENT 70-100

For concrete slabs and wood subfloors (on grade or above grade).



Sound Suppression!
Reduces surface noise and sound transmission especially in condos and other multi-floor construction!

Crush Proof!
Provides long lasting support and comfort. 96% crush-resistant!*


Self Leveling!
Thousands of Polyshims level out floor irregularities.

Air Flow Technology!
Creates a pocket of constantly circulating air which inhibits mold growth - perfect for basements.

Protection!
8" film overlap with adhesive strip seals out moisture to protect floors. Can be used over radiant heat.

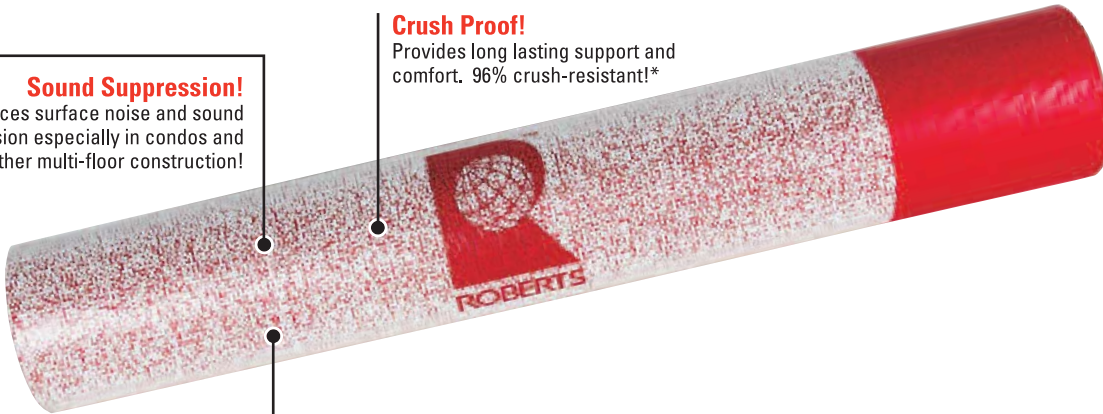

Display!
Trilingual display box

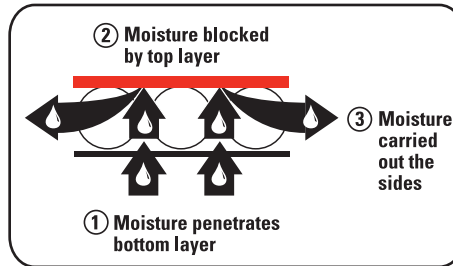

In the growing market of laminate and engineered hardwood floating floors, the biggest concerns are noise/sound and water/mold damage. Roberts Underlayments are engineered to meet the highest standards in sound reduction, moisture protection, comfort and even minor sub-floor corrections.

Roberts Underlayment and your floor, the perfect HARMONY.

Item Code:	70-100-12	70-100-1
Unit of Measure:	12 rolls per case	Roll
Coverage:	100 sq ft per roll 1200 sq ft per case	630 sq ft per roll
Width of roll:	40"	40"
Length of roll:	30 feet (360")	189 feet (2268")
Thickness:	1/8"	1/8"
Weight per roll:	3 lbs. 10 oz.	21 lbs.
Diameter of roll:	7-1/8"	16-1/2"

TECHNICAL SPECIFICATIONS

STC (Sound Transmission Loss Test)	67
IIC (Impact Sound Transmission Test)	68
R-Value**	0.39

Both tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50.

***Compression Test Results** - In a standardized test using 1,320 lbs. of pressure, Roberts Harmony Underlayment retained 96% of its original thickness after seven days, compared to only 57% by a leading 2-in-1 foam product.

****R-Value** - Rating used to measure resistance to heat flow.

Roberts Consolidated Industries, Inc. • Boca Raton, FL 33487 • (800) 423 6545 • www.robertsconsolidated.com

Roberts Company Canada Ltd.
PH: 800 840 9422

O.E.P. Chile Limitada
PH: 562 622 6588

O.E.P. Australia Pty. Ltd.
PH: 011 61 3 9797 1888

Zocalis S.R.L.
PH: 541 14 765 9796

Estillon B.V.
PH: 0031 24 6485348

O.E.P. Co., N.Z., Limited
PH: 64 9 415 9700